*File No.* 431

Collection No.

*19* 33 .

Mysore Residency

Bangalore.

Pros. Serial Nos. 1-3

## Subject.

Grant for the construction of buildings for the Sacred Heart Boys' and Girls' schools, Shoolai, Bangalore.

| Previous References. | Later References. |
| --- | --- |
| F. No 130 of 1887. | F. No 224 of 1935 |

S.N.1
P.U.C.

Letter No. 3824/1-24, dated the 7th December 1933, from the Inspector of Schools, Coorg & Bangalore.

---

S.N.168
130/87
(A)

In November 1924 the Inspector of Schools recommended a full grant of Rs. 9390/- towards the construction of a building for the Sacred Heart School. But the Resident

S.N.169
(B)

sanctioned only half grant of Rs. 4695/- . As the -- management was not able to meet the other half of the cost of the --

S.N.186
(D)

building, the grant was subsequently cancelled.

(E)

Para 1 of P.U.C.

The Inspector of Schools says that an application for a grant towards the construction of buildings for the Sacred Heart Boys' & Girls' Schools was received in 1931, but in spite of its urgency it was not found possible to find money for the purpose until this year. He recommends (after consultation with the Executive Engineer) that two separate schools should be built, of identical design and equal cost. The estimated cost of the two schools is Rs. 14,638/- and he recommends under Rule

Page 12

47(1) of the Grant-in-Aid Code for Indian Schools --- two-thirds grant of Rs. 9758-10-8 as the parish is of the poorest and the school is free and for the children of parents of servant class.

A sum of Rs. 5,000/- only has been budgetted for in the current year's budget estimates for this purpose under

"Building

"Building and furniture grant to Primary Schools". The Inspector therefore proposes to re-appropriate the additional amount of Rs. 4,759/- from the head "Building and -- furniture grant to Secondary schools". He says that the remaining amount under the latter head is sufficient to meet the needs of the High Schools in the course of this year.

If approved the grant recommended may be sanctioned.

Draft submitted for consideration.

S. Singaroyan
14-12-33

Issued No. 84, dated the 3rd January 1934.

Submitted.

S. Singaroyan
4-1-34.

S.N. 2

Resident

E/A 8/12

# EDUCATIONAL DEPARTMENT.

In future letters, please quote No. 3824/1-24 dated and short title* Rec'd Reg'd

Enclosures Application, plans &c

Spare copies nil.

All communications to be addressed to the official address and not by name.

Dated 7-12-1933.

**From**

F. F. C. Edmonds Esq., M. A., B. Sc.,

Inspector of Schools, Coorg and Bangalore.

**To**

**The** Secretary to the Hon'ble the Resident in Mysore, Bangalore.

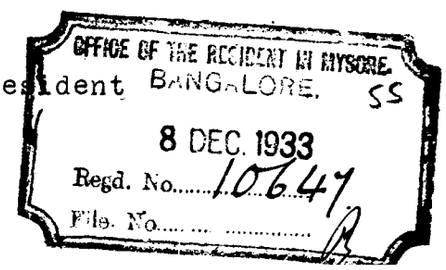


**Sir,**

I have the honour to enclose herewith an application for a grant towards the construction of buildings for the Sacred Heart Boys' and Girls' Schools, Shoolai, together with the plans and estimates duly prepared by the Municipal Executive Engineer. This application was received in 1931 but in spite of its urgency it was not found possible to find money for the purpose until this year.

2. In this connection, I invite a reference to your letter No. 9446/130-1887, dated 26-11-24, wherein the Hon'ble the Resident's sanction was conveyed for the payment of a building grant of Rs. 4695/- to the School. The amount could not be utilised as the management was not able to meet half the cost of the building, and the grant was subsequently cancelled (vide your letter No. 1550/130-1887, dated 20-2-25).

S.N. 169 130/87 B

S.N. 186 130/87

3. I have inspected the school on several occasions. The buildings are in a deplorable condition and have been so for years. They are totally unsuitable for school purposes and are most unhygienic quite apart from the overcrowding, ~~and have been so for years~~. I could no continue to sanction the continuance of the Schools under such conditions were it not for the fact that there is no possible alternative accommodation. The congestion is such that the boys occupy floor space adequate for 1/3rd of their number only, while

the

the girls are twice as numerous as the accommodation should permit. I recommend (after consultation with the Executive Engineer) that two separate schools should be built, of identical design and equal cost. The boys who attend are more numerous than the girls, but a tiffin room in the girls' school is required for the religious teachers. The schools will be built at a distance of 50 yards from each other.

4. The parish is of the poorest and the school is free and for the children of parents of servant class. Therefore under Rule 47 (1) of the Grant-in-Aid Code for Indian Schools in the Civil and Military Station, Bangalore, I recommend that a grant of Rs.9,758-10-8 or [redacted] two-thirds of the actual total cost, whichever is less, be sanctioned in respect of the two schools. The need for this work is, in my opinion, of the utmost urgency.

5. I request that sanction may be accorded early (if possible by 31-12-33) to enable the buildings to be finished by the end of the financial year. I regret the delay in submitting this application which is due to my having had to insist on a revision of the plans first submitted.

6. A sum of Rs.5,000/- has been allotted in the current year's Mysore Assigned Tract budget estimates, specifically for the above purpose. As this amount does not cover the grant recommended to be sanctioned, I propose that a sum of Rs.4759/- be re-appropriated from the head 'Account-II-Education-B-Secondary-Grant-in-Aid to Non-Government Secondary Schools-Building and Furniture grant to Secondary Schools". The remaining amount under this head is sufficient to meet the needs of the High Schools in the course of this year. The necessary re-appropriation statement will be sent along with the Final Surrender Statement in February next.

7. The expenditure may be finally debited to the head "Account-II-Education-D-Grant-in-Aid to Non-Government Primary Schools-Building and Furniture grant to Primary Schools" in the current year's

year's Mysore Assigned Tract budget.

I have the honour to be,

Sir,

Your most obedient servant,

Inspector of Schools,

Coorg & Bangalore.

L. F. Form No. 70. (Thick)

# Estimate—Detailed Measurement Sheet.

District _____ Taluk _____ Taluk Board _____

Name of Work Constructing a school in Sacred Heart church

Main-head Compound, sholay-

Sub-head _____

Estimate No. _____ 19

Amount of Estimate Rs. 7319/-

Hoe & Co., Madras—1-3-1932.

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| Earthwork excavation for formdation. | | | | | | |
| Side rooms abroumd. | 2 | $108\frac{3}{4}$ | 3. | 3. | 1958 | |
| Longitudinal walls of central rooms. | 2 | $39\frac{1}{4}$ | 3. | 3. | 707. | |
| Cross walls of side rooms | 2 | $12\frac{1}{8}$ | 3 | 3. | 218. | |
| Cross walls of central rooms | 1 | $14\frac{1}{8}$ | 3 | 3. | 127. | |
| Rear Verandah retaining wall 3 sides | 1 | $69\frac{7}{8}$ | 2 | 2. | 280 | |
| Steps at rear. 3 sides. | 1 | $52\frac{3}{4}$ | $2\frac{1}{2}$ | $\frac{1}{2}$ | 66 | |
| Total cft | | | | | | 3356. |
| 2. Stone jelly in lime concrete Beds for all formdations. | | | | | | |
| Side rooms abroumd. | 2 | $108\frac{3}{4}$ | 3 | $\frac{1}{2}$ | 326 | |
| Longitudinal walls of central rooms. | 2 | $39\frac{1}{4}$ | 3. | $\frac{1}{2}$ | 118. | |
| Cross walls of side rooms. | 2 | $12\frac{1}{8}$ | 3 | $\frac{1}{2}$ | 36. | |
| Cross wall of central room | 1 | $14\frac{1}{8}$ | 3 | $\frac{1}{2}$ | 21. | |
| Rear Veramdah retaining wall 3 sides. | 1 | $69\frac{7}{8}$ | 2 | $\frac{1}{2}$ | 70 | |
| Total cft | | | | | | 571. |
| 3. Size stone in lime filling Foundation & basement. Formdation first & second footings. | | | | | | |
| Side rooms abroumd. | 2 | $108\frac{3}{4}$ | $\frac{2\frac{1}{2}+2}{2}$ | 1. | 489. | |
| Cross walls of above. | 2 | $\frac{12\frac{5}{8}+11\frac{3}{4}}{2}$ | $\frac{2\frac{1}{2}+2}{2}$ | 1. | 58. | |
| Longitudinal walls of central rooms. | 2 | $\frac{39\frac{3}{4}+40\frac{1}{4}}{2}$ | $\times \frac{2\frac{1}{2}+2}{2}$ | $\times 1$ | 180 | |
| | | | | | 727 | |

Co

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | | | B.7. | | 727. | |
| Cross wall of central rooms | 1 | $14\frac{5}{8}+15\frac{1}{8}$ / 2 | $2\frac{1}{2}+2$ / 2 | 1. | 33 | |
| Foundation 3rd footing and basement. | | | | | | |
| Side rooms above- | 2 | $108\frac{3}{4}$ | $1\frac{1}{2}$ | 3. | 979 | |
| Cross walls of above- | 2 | $13\frac{5}{8}$ | $1\frac{1}{2}$ | 5. | 123. | |
| Longitudinal walls of C. Room | 2 | $40\frac{3}{4}$ | $1\frac{1}{2}$ | 3. | 367. | |
| Cross wall in central rooms- | 1 | $15\frac{5}{8}$ | $1\frac{1}{2}$ | 3. | 70. | |
| Corner pilasters- | 6 | $4\frac{3}{4}$ | $1/4$ | 3 | 4 | |
| Side- pilasters- front side- | 2 | $2\frac{1}{2}$ | $1/4$ | 3. | 4 | |
| Rear Basement Rear Verandah | | | | | | |
| Retaining wall 3 sides- | 1 | $71\frac{3}{4}$ | $1\frac{1}{2}$ | 3 | 321 | |
| Steps of Verandah 3 sides. | 1 | $52\frac{3}{4}$ | $2\frac{1}{2}$ | $1/2$ | 66 | |
| -do- | 1 | $55\frac{3}{4}$ | 1 | $1/2$ | 28. | |
| Total c/f | | | | | 2736 | |
| Deduct- Plinth Slab of Verandah | 1 | $7'2\frac{1}{2}$ | $1\frac{1}{2}$ | $1/4$ | 27. | |
| Sills of doors 4'x7' | 3 | 5 | $1\frac{1}{2}$ | $1/4$ | 4 | |
| -do- 3½'x7' | 1 | $3\frac{1}{2}$ | $1\frac{1}{2}$ | $1/4$ | 1 | |
| Total deductions c/f | | | | | 41. | |
| Balance - Stone in line c/f | | | | | | 2695 |
| 4. Earth filling in basement- | | | | | | |
| Central rooms | 2 | $19\frac{5}{8}$ | $15\frac{5}{8}$ | $1\frac{1}{2}$ | 922 | |
| Front side rooms- | 2 | $20\frac{5}{8}$ | $13\frac{5}{8}$ | $1\frac{1}{2}$ | 543 | |
| Rear do- | 2 | $15\frac{5}{8}$ | $13\frac{5}{8}$ | $1\frac{1}{2}$ | 617 | |
| Verandah at rear 3 sides- | 1 | $71\frac{3}{4}$ | $5\frac{1}{2}$ | $1/2$ | 197. | |
| Total c/f | | | | | | 2279. |
| | | | Carried over | | | |

*To be filled in by the Local Board's Office.*

Date of receipt in Board's Office _____ 19 .

Sanctioned for Rs. _____ in Board's

Proceedings No. ____ dated _____ 19

Dated _____ 19 . *President*, _____ *Board.*

*Overseer*, _____ *Taluk.*

_____

*L. F. Engineer.*

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| 5. Burnt brick in clay Superstructure. | | | | | | |
| Side rooms abovms. | 2 | 108 3/4 | 1/8 | 14. | 342b. | |
| Cross walls of above. | 2 | 14. | 1/8. | 14. | 441. | |
| Longitudinal walls of Central rooms. | 2 | 41/8. | 1/8. | 14. | 1295. | |
| Cross walls of Central rooms | 1. | 16. | 1/8 | 14. | 252. | |
| Corner pilasters. | 6 | 4 | 3/8 | 14. | 126. | |
| Intermediate -do in front | 2 | 2 | 3/8 | 14. | 21. | |
| Total C/f | | | | | 5561. | |
| Deductions. | | | | | | |
| Doors 4'x7'. | 6 | 4 | 1/8 | 7. | 189. | |
| Lintels of the above | 6 | 5/2 | 1 | 1/2. | 17. | |
| Doors 3'1/2'x7' | 2 | 3/2 | 1/8 | 7. | 55. | |
| Lintels of above. | 2 | 5. | 1 | 1/2. | 5. | |
| Windows 3'x4' | 22 | 3 | 1/8 | 4. | 297. | |
| Sills of above. | 22 | 4 | 1/8 | 1/4. | 25. | |
| Lintels of above | 22 | 4/2 | 1 | 1/2 | 50. | |
| Ventilators 3'x1 1/2'. | 20 | 3 | 1/8 | 1/2 | 101. | |
| Lintels of ventilators | 20 | 4/2 | 1 | 1/2 | 45. | |
| Vents 3'x3/4'. | 10 | 3 | 1/8 | 3/4 | 25. | |
| Lintels of above. | 10 | 4/2 | 1 | 1/2 | 23. | |
| Bed plates for R.S. beams | 2x10 | 1/2 | 1 | 1/2 | 15. | |
| Brick in lime masonry for jambs of doors (all) | 2x8 | 1/8 | 1/8 | 7. | 142 | |
| Jambs of windows. | 2x22 | 1/8 | 3/4 | 4. | 149 | |
| Ventilators 3'x1/2' / jambs & soffit | 20 | 1/8 | 3/4 | 7/2 | 127. | |
| Vents 3'x3/4' -do- | 10 | 1/8 | 3/4 | 6. | 51 | |
| Tops of walls of side rooms abovms. | 2 | 108 3/4 | 1/8 | 1. | 245 | |
| do — cross walls of side rooms | 2 | 14 | 1/8 | 1. | 32 | |
| Longitudinal walls of central rooms | 2 | 41/8 | 1/8 | 1. | 93. | |
| Total carried over | | | | | 1686. | |

L. F. Form No. 70. (Thick).

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | | | Total deduction B & H | | | |
| Cross wall in central rooms | 1 | 16 | 1/8 | 1. | 16. | |
| [illegible] Corner pilasters | 6 | 4 | 3/8 | 1. | 7 | |
| do —— Inter. pilasters | 2 | 2 | 3/8 | 1. | 2 | |
| | | Total deductions c/f —— | | | 1115. | |
| | | Balance c/f —— | | | | 3846. |
| 6. Brick in lime Superstructure | | | | | | |
| - for deductions - in above [illegible] | | nos. 5. | | | 868. | 868. |
| 7. Stone slabs 3" to 4" Thick. | | | | | | |
| Sills of doors 4'x7' | 1 | 3' | 1/2 | - | 1.5. | |
| do —— 3½'x7' | 2 | 4½ | 1/2 | - | 14. | |
| Plinth Slab of Verandah | 1 | 72½ | 1/2 | - | 37. | |
| Sills of windows - | 22 | " | 1/2 | - | 15½ | |
| | | Total c/f —— | | | | 300 |
| 8. Stone slabs 6" Thick. | | | | | | |
| Steps at rear. | 1 | 33½ | 1 | - | 54 | |
| do | 1 | 33 3/4 | 1 | - | 54 | |
| Lintels of doors 4'x7' | 5 | 5½ | 1 | - | 5. | |
| do —— 3½'x7' | 2 | 5' | 1 | - | 10 | |
| Lintels of windows - | [illegible] | 4½ | 1 | - | [illegible] | |
| do —— ventilator | [illegible] | 4½ | 1 | - | [illegible] | |
| do —— vents | 10 | 4½ | 1 | - | 45. | |
| Bed plates c/f R. S. beams | [illegible] | 1' | 1 | - | [illegible] | |
| | | Total c/f —— | | | | 417. |
| 9. Flooring one line. | | | | | | |
| Plinth Slab of Verandah 3 sides | 1 | 72½ | 1 3/4 | - | [illegible] | |
| Sills of doors 4'x7' | 6. | 4 | 1½ | - | [illegible] | |
| do —— 3½'x7' | 2 | 3½ | 1½ | - | 11 | |
| of windows. | [illegible] | 3. | 2½ | - | [illegible] | |
| do —— vents | [illegible] | 1½ | 1/4 | | [illegible] | |
| | | Total carried over —— | | | | 3[illegible]9 |

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | B. 7. | | | | 340. | |
| Beds of R.S. beams. | 2×10 | 1½ | 1 | · | 30 | |
| Steps Top. Surface. | 1 | 5-5¾ | 1 | - | 56 | |
| do | 1 | 5 3¾ | 1 | - | 54 | |
| do (Rise) | 1 | 5 7¾ | - | ½ | 29- | |
| do | 1 | 5 5¾ | - | ½ | 28 | |
| Total S/f | | | | | | 537. |
| 10. Cut stone work. | | | | | | |
| Caps & bases of pillars of Verandah | 2×8 | ¾ | ¾ | ½. | 3- | |
| Pillars. | 8 | ½ | ½ | 6. | 12 | |
| Total c/f | | | | | | 17. |
| 11. Cutting tongues and grooves in bases & caps for fixing with pillars. | 2×8 | - | - | - | 16 | 16. |
| 12. Teak wood wrought frames & fixes. | | | | | | |
| Doors 4'×7' (excluding sill frames) | 6 | 19½ | 3" | 4" | 10. | |
| do 3½'×7' (do) | 2 | 19 | 3" | 4" | 3. | |
| Windows 3'×4' | 22 | 16 | 3" | 4" | 29- | |
| Mullions of above | 22 | 4 | 2" | 4" | 5. | |
| Ventilators 3'×1½' | 20 | 11 | 3" | 4" | 18- | |
| Total c/f | | | | | | 65. |
| 13. Teak wood panelled shutters 1¼" Thick complete with fittings. | | | | | | |
| Doors 4'×7' | 6 | 37/12 | - | 6 5/6 | 147- | |
| do 3½'×7' | 2 | 3½ | - | 6 5/6. | 42 | |
| Total S/f | | | | | | 189. |
| 14. Teak wood glazed shutters 1" Thick Complete. | | | | | | |
| Windows 3'×4' | 22 | 2½ | - | 3 7/12 | 197. | |

C.O.

L. F. Form No. 70. (Thick).

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| Partition | | | 13.7 | | 177 | |
| | | | | | | |
| Total Sft | | | | | | |

15. Iron work -

For reinforcement 2x6 4 x 10.5 lbs

For bars 1/2" dia

For vertical

Total lbs 80.

16. For steel beams

For slab work -

For — at rear (10'x5') 2x1 12 = 32 } 50 lbs

For central beam (11) 2x1 12 1/2 }

Reinforcement work

2x2 1 45 x 1.5

Total cwt lbs

Total cwt

17. Cutting holes in slab (bills)

For fixing lintel beams

( of doors 2x2 16

18. Roof work length of feet

wall plate for verandah

3 Sides 1 90 1/2 2"

Common rafters @ 3" centres

for verandah 4 6 11 3"

jack rafters & valleys 2x2 4 2"

Hip

Valley rafters 2 16 3"

Total cft

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| 19. Roofing with first class Mangalore Tiles - Verandah pent roof 3 sides. | 1 | $\frac{90\frac{1}{2}+69}{2}$ | 11 | - | 850 | 850. |
| 20. Teak wood battens 2" x 1" in section. @ 110 Rs per Sqre. | 8·50 x 110 - | | | | 935. | 935. |
| 21. Providing Valley gutters complete with teak wood planks &c. For Verandah. | 2 | 16 | - | - | 32. | 32. |
| 22. Providing Chunnam bands over roof. At ends of Verandah roof | 2 | 11 | - | - | 22. | |
| Along the side of wall | 1 | $91\frac{1}{2}$ | - | | 92 | |
| Total Rs | | | | | | 114. |
| 23. Providing teak wood eave board scalloped complete with painting & fixing (9" x 3/4"). Eaves of Verandah roof 3 sides | 1 | 55 | - | - | 55. | |
| Sides - do | 2 | 11 | - | - | 22. | |
| Total Rs | | | | | | 77 |
| 24 Providing teak wood frames 2" x 2" in section and fixing expanded metal 1/2" mesh complete with intermediate supports complete For Vents. | 10 | 3 | - | 3/4 | 23. | 23. |
| 25. Roofing with stone slabs complete Side rooms - | 2. | $39\frac{2}{8}$ | $15\frac{1}{2}$ | - | 1236 | |
| Central rooms - | 1 | $41\frac{2}{8}$ | $17\frac{1}{2}$ | - | 733 | |
| Total Sft | | | | | | 1969. |
| 26. Brick in lime Cornice 6" in projection. Front side - | 1 | $96\frac{5}{8}$ | - | - | 77 | |

Carried over

L. F. Form No. 70. (Thick).

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | | | | B/f. | 77 | |
| Sides -do- | 2 | 41 2/8 | - | - | 84. | |
| Rear ends- | 2 | 17 | - | - | 34. | |
| do— Sides | 2 | 22 2/8 | - | - | 46. | |
| -do—(Longitudinal) | 1 | 41 2/8 | - | - | 41 | |
| | | Total S/f | | | | |
| 27. Brick in lime plain footing 1' high and 4 1/2" thick complete. | | | | | | |
| Front side- | 1 | 74 | - | - | 74. | |
| Sides. | 2 | 40 3/4 | - | - | 82 | |
| Rear ends. | 2 | 16 5/8 | - | - | 33. | |
| Rear sides. | 2 | 22 1/4 | - | - | 45. | |
| Rear (Longl. sides) | 1 | 42 1/8 | - | - | 42. | |
| | | Total R/ft | | | | 276 |
| 28. Brick in lime cornice 3" in projection. Below roof. | | | | | | |
| Central rooms. | 2 | 72 | - | - | 144. | |
| Side rooms - front | 2 | 70 | - | - | 140. | |
| -do— Rear | 2 | 60 | - | - | 120. | |
| | | Total R/ft | | | | |
| 29. Iron works for Lamp backs. | | | | | | |
| 1/4" Rods for front side (Longl). | 2x2 | 41/2 | = 166. | | | |
| Cross pieces. | 2x6x2 | 2/2 | = 60. | | | |
| Rods for Lamp shades - | | | | 635 | | |
| of Ventilators over door & | | | | x 16 7/8 | | |
| rear windows. | 4x1 | 13 | = 52 | | 115 | |
| Rods for Lamp shades at side | 2x3x2 | 36 | = 288 | | | |
| Cross pieces. | 2x2x2x6 | 2/2 | = 120 | | | |
| | | Total lbs | | | | 115 |

Carried over

L. F. Form No. 70. (Thick).

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Wor | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| 30. 1¼" Thick cement plastering reinforced with Hessian cloth. | | | | | | |
| For Sunshades - Front | 2 | 41½ | 2 | - | 166. | |
| For Ventilators over front door & rear windows - | 4 | 4 | 2 | - | 32 | |
| Sides, Sun shades over windows & Ventilators | 2×2 | 36 | 2 | - | 288 | |
| Total S/F | | | | | | 486. |
| 31. Cement concrete brackets 2" thick. | | | | | | |
| For Sunshades - of windows & Ventilators on front side | 2×2×6 | - | - | - | 24 | |
| For Ventilators over front door & rear windows - | 2×4 | - | - | - | 8. | |
| For Sunshades of windows & Ventilators at Sides | 2×2×2×6 | - | - | - | 48. | |
| Total no. | | | | | | 80. |
| 32. Lime plastering ½" thick. | | | | | | |
| Inside - Central Rooms | 2 | 72 | - | 14 | 2016. | |
| Side Front rooms - | 2 | 70 | - | 14 | 1960. | |
| Side rear rooms - | 2 | 60 | - | 14 | 1680. | |
| Verandah 3 sides - | 1 | 82 2/8 | - | 11 | 956 | |
| Add for jambs & soffits of all openings - | Lump Sum | | | | S/F 500. | |
| Total S/F | | | | | | 7112. |
| Deductions - Doors - 4'×7' | 2 | 4 | - | 7 | 56. | |
| Doors 4'×7" | 2×4 | 4 | - | 7 | 224. | |
| do 3½'×7" | 2 | 3½ | - | 7 | 49. | |
| Windows 3'×4" | 22 | 3 | - | 4 | 264. | |
| Total carried over | | | | | | 593. |

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | | | | B.F. | 293 | |
| Ventilators 3'×1½" | 20 | 3 | - | 1½ | 90 | |
| Vents. 3'×3/4" | 10 | 3 | - | 3/4 | 23 | |
| Total deductions S/f | | | | | 106 | |
| Balance Internal plastering | | | | | 6406 | |
| Outside plastering. | | | | | | |
| Front and Lilles | 1 | 100 3/8 | - | 14/4 | 2255 | |
| Rear side | 2 | 17 | - | 14/4 | 476 | |
| -do- above roof of Verandah | 1 | 58 5/8 | - | 3½ | 203 | |
| do for jambs and soffits of all openings Sum | | | | | 150 | |
| Total S/f | | | | | 3284 | |
| Deductions - doors 4'×7" | 2 | 4 | - | 7 | 56 | |
| windows 3'×4" | 18 | 3 | - | 4 | 216 | |
| Ventilators 3'×1½" | 20 | 3 | - | 1½ | 90 | |
| Vents 3'×3/4" | 10 | 3 | - | 3/4 | 23 | |
| Total deductions S/f | | | | | 385 | |
| Balance outside plastering | | | | | 2819 | |
| Grand Total plastering S/f | | | | | 9225 | |

32. Flooring with Indian patent cement concrete 1" thick over 3" thick lime concrete and Platform coloured with acid

| | | | | | |
|---|---|---|---|---|---|
| Central Rooms - | 2 | 20 | 16 | - | 640 |
| Side front Rooms - | 2 | 11 | 14 | - | 308 |
| Side rear Rooms - | 2 | 16 | 14 | - | 448 |
| Verandah 3 Sides - | 1 | 84+62/2 | 5½ | - | 402 |
| Total S/f | | | | | 2078 |

White washing 2 coats.

| | | | | | |
|---|---|---|---|---|---|
| 2 Rooms Ceiling plastering | | | | | 640 |
| add cornice Circular | 4 | 4 3/4 | - | 14/4 | 268 |
| Front intermediate plastering | 2 | 23/4 | - | 14/4 | 78 |
| Total S/f | | | | | 6926 |

L. F. Form No. 70. (Thick).

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. L. | B. | D. | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| 35. Colour washing 2 coats as per outside plastering | | | | | 2817. | |
| Deductions- Pilasters as per those in Item no. 34. | | | | | 484. | |
| Balance s/f | | | | | | 2333. |
| 36. Cement pointing basement. | | | | | | |
| Front & sides. | 1 | 161 5/8 | - | 1 3/4 | 280. | |
| Rear ends. | 2 | 25 | - | 1 3/4 | 88. | |
| Verandah 3 sides. | 1 | 57½ | - | ½ | 29. | |
| Total s/f | | | | | | 397. |
| 37. Cement pointing steps & Item | | | | | 1 | 1 |
| 38. Wood oiling 2 coats as per area of roof | | | | | 850. | 850. |
| 39. Painting with 2 coats of Chocolate | | | | | | |
| Panelled doors 4'x7' | 2¼x6 | 4 | - | 7 | 378 | |
| Panelled doors 3½'x7' | 2¼x2 | 3½ | - | 7 | 110. | |
| Glazed windows. | 1½x22 | 3 | - | 4 | 396. | |
| do ventilators. | 1½x20 | 3 | - | 1½ | 135. | |
| Vents with X-P-Metal. | 1¼x10 | 3 | - | ¾ | 28. | |
| Total s/f | | | | | | 1047. |
| 40. Painting with 2 coats of mortant & tar - portions of all wood work embedding in & abutting against masonry. Item | | | | | 1 | 1 |
| 41. F.W. Terrenials 1½' panels & fixed complete. For Verandah roof | | 4 | - | - | 4 | 4 |
| 42. Clearing site, levelling ground around &c. Item | | | | | 1 | 1 |

## Estimate—Detailed Measurement Sheet—*Continued.*

| Details of Work. | Number. | Measurement in feet. | | | Area or Contents. | Total quantity of each description of work. |
|---|---|---|---|---|---|---|
| | | L. | B. | D. | | |
| 43 Construction of Arches - with Stone in lime foundation & Arches in 2 lime mortar, Stone, Cut Stone pillars & Cut Stone communication [illegible] Course & in projection, plain Cornice & projection, plain as per plan (To be paid as per actual) | | | | | | |

P.W.D., V-13—5,000—13-2-31 (6).

E. No. 31—Inner.

# ESTIMATE FORM—Abstract.

| Item number. (1) | Quantity. (2) | Description of work. (3) | Rate. (4) | Per (5) | Amount (6) | Total. (7) |
|---|---|---|---|---|---|---|
| | | | Rs. | | Rs. | Rs. |
| 1. | 3356 | Earthwork excavation - | 9/- | %c/t | 30- | |
| 2. | 571- | Stone jelly in lime concrete- | 26/12/- | %c/t | 153- | |
| 3. | 2698 | Size stone in lime founda & base- | 40/- | %c/t | 1079- | |
| 4. | 2994 | Earth filling in basement- | 5/- | %c/t | 15- | |
| 5. | 3846 | Burnt brick in clay superstructure | 24/4/- | %c/t | 933- | |
| 6. | 868- | Brick in lime superstructure - | 35/- | %c/t | 304- | |
| 7. | 300- | Stone slabs 3" to 4" thick - | 22/8/- | %s/t | 68- | |
| 8. | 417- | Stone slabs 6" thick - | 28/8/- | do | 119- | |
| 9. | 537- | Dressing one line- | 0/2/- | s/t | 67- | |
| 10. | 17- | Cut stone work. | 5/- | c/t | 85- | |
| 11. | 16. | Cutting tongues & grooves in capst base | 0/8/- | each | 8- | |
| 12. | 65. | Teak wood wrought, framed & fixed | 6/12/- | c/t | 439- | |
| 13. | 189. | Teak wood panelled shutters 1¼" thick | 1/4/- | s/t | 236- | |
| 14. | 253 | Teak wood glazed shutters 1" " | 1/- | s/t | 253- | |
| 15. | 631 lbs | Iron work. | 1¼/- | work | 79- | |
| 16. | 57·83 | Rolled steel work - panels & fixed. | 12/8/- | do | 648- | |
| 17. | 16. | Cutting holes in slabs (sills) - | 0/4/- | each | 4- | |
| 18. | 24. | Teak wood wrought & put up - | 6/- | c/t | 144- | |
| 19. | 850. | Roofing with first class mangalore tiles. | 12/- | Syr. | 102- | |
| 20. | 935. | Teak wood battens 2"x1"- | 75/- | %R/t | 70- | |
| 21. | 32 | Providing valley gutters complete | 1/8/- | R/t | 48- | |
| 22. | 114. | Providing Chunnam bands- | 0/1/9 | R/t | 12- | |
| | | | | Total Cr. | 4896- | |

## ESTIMATE FORM—Abstract.

| Item number. (1) | Quantity. (2) | Description of work. (3) | Rate. (4) | Per (5) | Amount (6) | Total. (7) |
|---|---|---|---|---|---|---|
| | | | Rs. | | Rs. | Rs. |
| | | B/7- | | | 45 9 | |
| 23. | 77. | Providing [illegible] | | | | |
| | | [illegible] | | | | |
| 24. | 23 | Providing [illegible] | | | | |
| | | [illegible] | | | | |
| | | Complete | [illegible] | [illegible] | | |
| 25. | 1969. | [illegible] | | | | |
| 26. | 25. | [illegible] | | | | |
| 27. | 176. | Brick in [illegible] | 1/- | 1000 | | |
| 28. | 404 to 115 | Brick in [illegible] | [illegible] | | | |
| | | Iron work. | [illegible] | [illegible] | | |
| 30. | 86 | [illegible] | | | | |
| 31. | 3 | [illegible] | 1/- | [illegible] | | |
| 32. | 9223. | [illegible] | 3/- | [illegible] | [illegible] | |
| 33. | 298 | Flooring with [illegible] | | | | |
| | | [illegible] | [illegible] | [illegible] | 22 | |
| 34. | 6890. | [illegible] | [illegible] | [illegible] | [illegible] | |
| 35. | 233. | [illegible] | | | 1 | |
| 36. | 397. | [illegible] | [illegible] | [illegible] | [illegible] | |
| | | [illegible] | 3/- | [illegible] | | |
| | 352 | [illegible] | 1/4 | [illegible] | | |
| | 1047 | [illegible] | [illegible] | [illegible] | 37- | |
| | | Total Co | — | | [illegible] | |

W.D. V-13—5,000—13-2-31 (6).

E. No. 31—Inner.

# ESTIMATE FORM—Abstract.

| Item number. (1) | Quantity. (2) | Description of work. (3) | Rate. (4) | Per (5) | Amount (6) | Total. (7) |
|---|---|---|---|---|---|---|
| | | | Rs. | | Rs. | Rs. |
| | | Total B.F | | | 7443 | |
| 40. | 1 No. | Painting with 2 coats of mortaur and tar. | 6/- | Ls | 6- | |
| 41. | 4. | Teak wood terminals 1½- | 1/- | each | 4 | |
| 42 | 1 No. | Clearing site, levelling ground & complete. | 10/- | Ls. | 10. | |
| 43 | 2. | Constructing porches complete (To be paid as per actuals) | 65/- | Ls.E | 130 | |
| | | | | Total Rs — | 7593. | |
| | | | | Contingencies - | 380 | |
| | | | | | 7973. | |
| | | Deduct 15% anticipated below. | | | 1196. | |
| | | | | Balance | 6777 | |
| | | Add 8% Supervision charges | | | 542 | |
| | | | | G. Total Rs - | 7319/= | |

B. Soma Sundaram
9. XI. 33.

2/11/33
Exe. Engineer

## ESTIMATE FORM—Abstract.

| Item number. (1) | Quantity. (2) | Description of work. (3) | Rate. (4) | Per (5) | Amount. (6) | Total. (7) |
|---|---|---|---|---|---|---|
| | | | Rs. | | Rs. | Rs. |

SCHOOL PROPOSED

ED IN THE COMPOUND OF

HEART CHURCH, SHOOLAY.

ALE 8 FT 10 I IN.

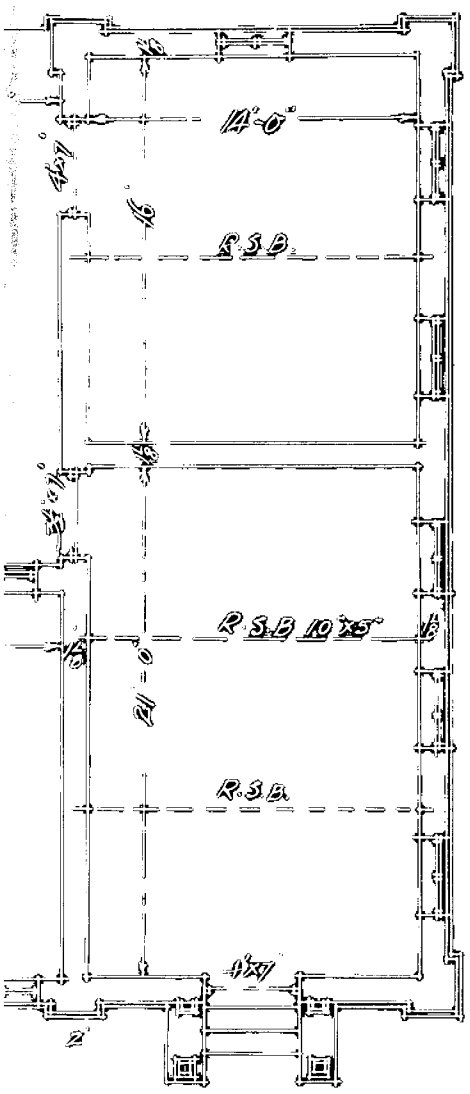


SECTION ON A.A.

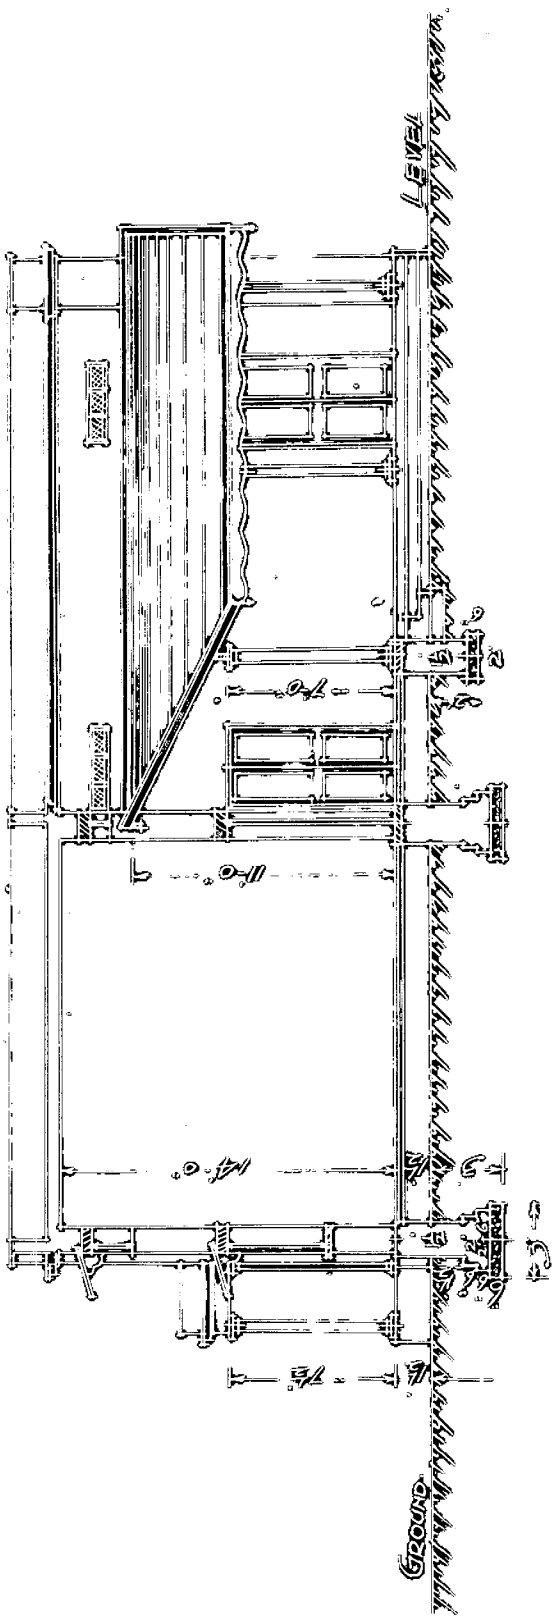


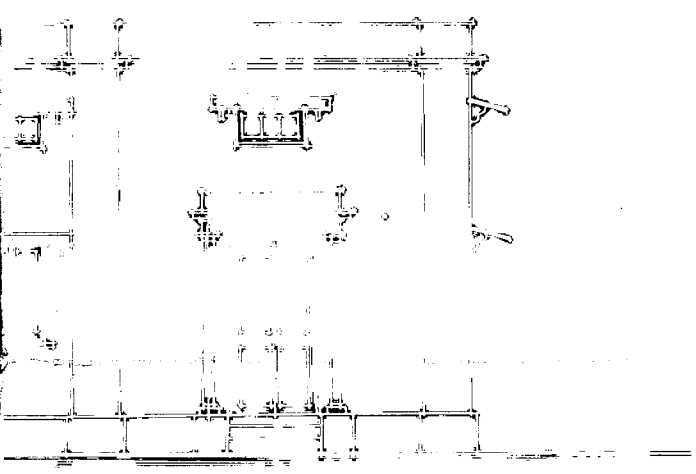

M I M. & G E.

EXECUTIVE ENGINEER.

PLAN O
TO BE CONSTRU
THE SACR

## GROUND PLAN.

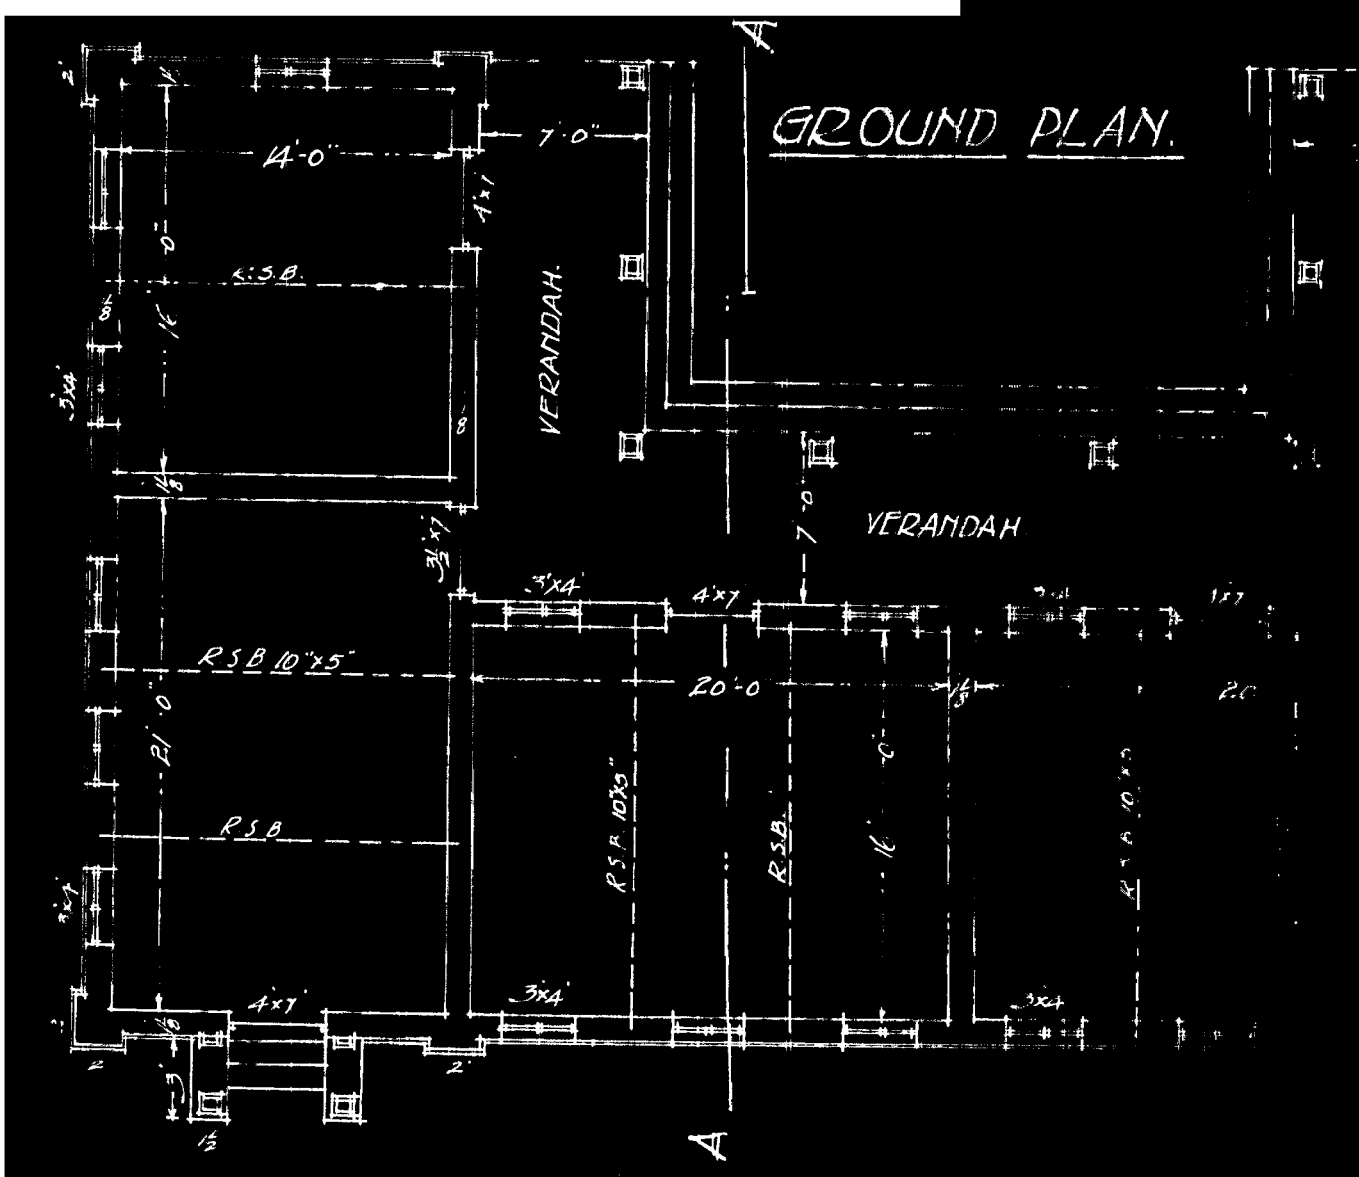


## FRONT ELEVATION.

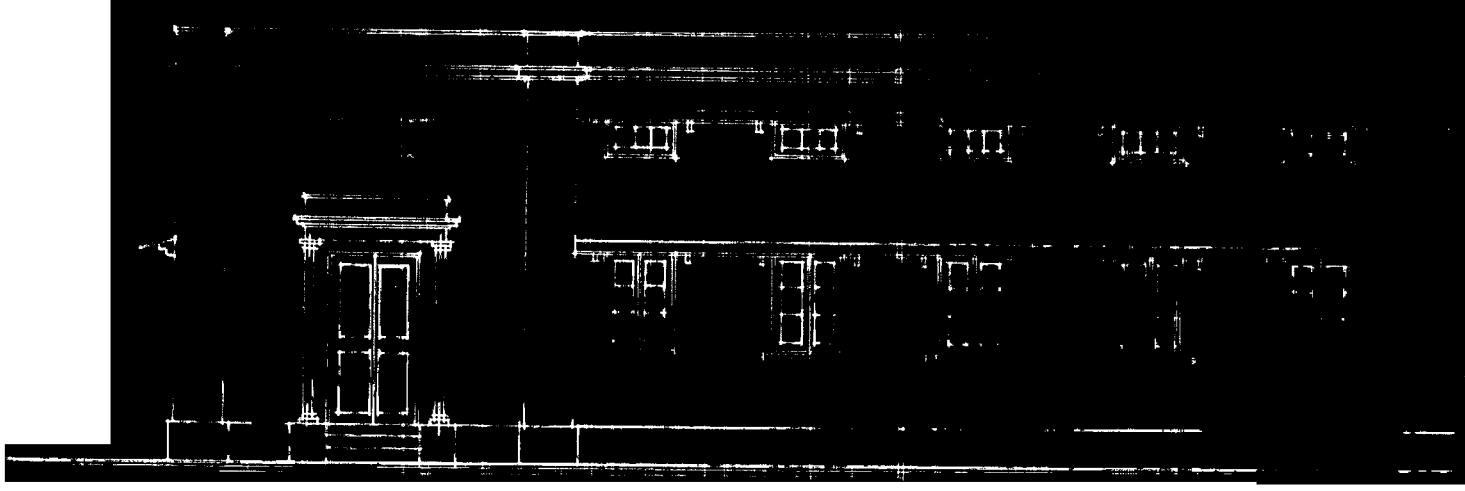

Edl. B-21—866—22-3-29.

# APPENDIX M.

CHAPTER VIII, RULE 53.

Application for aid towards the cost of building a School in the Sacred Heart's Church Compound - Richmond Road. Shoolay Bangalore.
School / ~~College~~ ( School ) at the above plot in the District of Bangalore & Cantt. Station.

Number and date of the Proceedings or memorandum recognizing school under the Madras Educational Rules.

---

Brief history of the institution from the date of its establishment to the date of application tracing its growth and development and furnishing among other things an accurate account of its financial condition.

Sir,

In Short I beg to submit the following history as per your requirement to the maximum facts of possibility due to the absence of the Parish Priest of this Church, Rev. Fr. J. V. D'Souza, who is out of place on leave, that the parisheners of Sacred Heart's, about a hundred years ago belonged to St. Mary's Church, Blackpally (Bangalore). This Church had a sub station at the old Race Course, Victoria Road. B'lore. There was a School during that time at St. Antony's Church Shoolay (Bangalore).

In 1892 the foundation of the present Sacred Heart's Church was laid and 1895 the Church alongwith the

P.T.O.

*History of the Institution*—cont.

the presbitory was completed where the above mentioned institution was transfered. The present girls' School was then for the boys and the girls were in a small quarter near the entrance-gate of the Compound of this Church where at present a servant is put up.

Due to the insufficiency of space for the boys' the old School, refered above, the school was held in the rooms of the presbitory downstairs and the girls' school in the present building which now exists in the same Condition as before.

There we two nuns for the girls and two men for the boys as teachers to teach about Sixty pupils in each school of standards I to IV only The teachers were paid Rs 10/= & Rs 5/= towards the Head master or Mistress and his or her assistants respectively

It is in June 1922 that, through the efforts of Rev. Fr. J.L. Cochet, the parish priest of this Church between 1920 & 22, the grants were allowed by the Govt., After him Rev. Fr. J.V. D'Souza succeeded in the prosecution of the work of the former.

After the receipt of grants Fr. Cochet increased the staff by having three teachers in each school (trained) on a pay of Rs 25 for the H.M and Rs 15 & Rs 10/= respectively to the asst teachers of each School. The development of employing teachers in the Schools was done by Fr. J.V. D'Souza the Successor of Fr. Cochet.

The present pay allotted to the teachers of the Boys' School:—
Head master Rs 30/= 1st asst Rs 20/= 2nd asst Rs 15/=

P.T.O

*History of the Institution*—cont.

and of the Girls' School :-
Head Mistress Rs 25/- +5 additional lady teachers as Rs 20; Rs 15; Rs 15; Rs 15 and Rs 12/- respectively. &

The Current Strength of the Boys' School is 144 and of Girls' 110., The institution is quite free for the Children being very poor in financial helps for their being qualified in Schools where fees are demanded Besides the grants allowed to meet the maintainances of the staff and additional expences of the institution, the Mission Supports.

NOTE.—(1) This need not be given if a reference to a history previously given can be furnished.

(2) The names and designations of the persons who form the committee of management should be specified.

The strength of the different classes or forms as stood on the 31st March of every year for five years preceding the year in which the application is submitted.

| | 1929. | | 1930. | | 1931. | | 1932. | | 1933. | | Number of pupils each class on the date of application. | | Number of pupils that can be accommodated in each class room. | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Boys | girls | Boys | girls | B. | G. | B. | G. | B. | G. | B. | G. | B. | G. |
| VI Form .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| V „ .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| IV „ .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| III „ .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| II „ .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| I „ .. | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| V Class .. | - | - | - | - | - | 8 | - | 8 | - | 6 | - | 8 | - | 4 |
| IV „ .. | 8 | 12 | 14 | 12 | 10 | 10 | 17 | 10 | 10 | 12 | 11 | 8 | 12 | 8 |
| III „ .. | 10 | 14 | 17 | 13 | 22 | 14 | 16 | 11 | 14 | 14 | 28 | 19 | 16 | 12 |
| II „ .. | 16 | 27 | 26 | 18 | 25 | 21 | 21 | 20 | 28 | 22 | 32 | 24 | 18 | 16 |
| I „ .. | 26 | 70 | 44 | 73 | 46 | 87 | 39 | 62 | 40 | 75 | 73 | 51 | 40 | 30 |
| Total .. | 60 | 123 | 101 | 116 | 103 | 140 | 93 | 111 | 92 | 129 | | | | |

Boys' School

| | Class room. | Area. |
|---|---|---|
| a | I Class | 14′ × 8 ½′ |
| b | Big hall for II & IV classes. | 22 ¾′ × 9 ¼′ |
| c | Room by side of III class | 9′-2″ × 4′-7″ |
| d | | |
| e | | |
| f | | |
| g | | |
| h | | |
| j | | |

Girls' School.

| | Class room. | Area. |
|---|---|---|
| k | one Hall | 30′ × 11′ |
| l | Verandah | 28′ × 6′ |
| m | | |
| n | | |
| o | | |
| p | | |
| q | | |
| r | | |
| s | | |

NOTE.—If there be any striking variations in the strength as shown above such variations should be accounted for.

Note:- The institutions specified above towards the Boys' & Girls' school are mere rectangular blocks forming small halls which are given above as per the rough plan of them enclosed herewith the page for reference

Character of and necessity for the proposed work in details.

The plan proposed is meant for boys as well as for the girls dividing the school separately for boys and girls respectively

Since the space of the present area of the Classes in the schools, is insufficient for accomodation and as a reason of refusal done to so many of the Children who had applied for admission the opening of the new School is quite necessary.

(i) Is a sketch plan of the proposed site and building attached ?

It is already sent for necessary action.

(ii) Does it show—

(*a*) The relation of the proposed building or extension to the existing buildings ?

The new building is quite a separate one.

(*b*) Any alteration in existing buildings necessitated by it ?

Nil.

(*c*) The purpose to which the existing buildings are now put ?

We are having classes in the existing buildings.

(*d*) The purpose to which they will be put when the new building or Present extension is complete ?

The girls' school will be the house for the watchman. The Boys' school will be included to the presbitory itself since the school itself is in the presbitory.

NOTE.—Any notes that cannot be conveniently inserted in the plan may be given under each c the above headings.

(*a*) Probable cost of the proposed work.
Estimate given by the Ex. Engineer, W.H. Murphy Esq: being Rs ~~23,154/-~~ 14638/- for ~~both boys~~ and girls' School

(*b*) Whether the management has the necessary funds to complete the work in the event of the application being favourably considered.
yes.

(*c*) Whether the managing body has been registered under the Indian Companies Act of 1913 or any other Act and, if so, whether attested copies of the Memorandum of Association and the Articles of Association are submitted.

(*d*) If the aid sought for is towards the cost of site, declaration that it is the cheapest suitable site.
Since the estimate is prepared by the Executive Engineer, it is left to his Consideration & option over this

(*e*) Declaration that the management is prepared to execute the prescribed deed.
To run the School for education in the new building.

(*f*) If the property is not owned by the correspondent, declaration that the owner or his or her legal representative will execute the deed or will be made a party to the deed.

(*g*) In the case of mission institutions the name and address in full of the person who holds a power-of-attorney on behalf of the mission to execute the prescribed deed.
His Excellency the Most Rev. M. Despatures.
Bishops' House Cleveland Town
Bangalore.

(*h*) Name, designation and qualification of the person by whom detailed plans and estimates and specifications will be prepared.
W. H. Murphy Esq., The Executive Engineer.
Cen. Stn. Bangalore.

(*i*) Whether the title to the property is clear and in order and by whom the title-deeds were examined.

(*j*) The latest date on which the management wishes to (i) begin the work and (ii) complete the work.
(1) No sooner the plans etc for Constructing the School are sanctioned than the work will be begin (2) and Completion about the middle of March 1934

(*k*) Is the declaration with regard to encumbrance, alienation and the conditions of recognition and aid attached?

(*l*) Amount of building grants drawn by the institution in previous years with the number and date of the sanction and the purposes for which given. (Particulars should be given from the date of establishment of the institution.)

(*m*) If the aid sought is towards the construction of a hostel, declaration that the hostel will be managed according to rules approved by the Director of Public Instruction.

(*n*) The treasury at which the grant if sanctioned is to be payable.

To, The Rev. Fr. J. V. D'Souza.
Parish Priest.
Sacred Heart Church.
Richmond Road (Bangalore)

(*o*) The annual expenditure incurred in the upkeep of the institution and how much of it is met from—

| | Fees. | | | Government grant. | | | Other sources. | | | Manager's funds. | | | Total. | | | Remarks. |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | RS. | A. | P. | RS. | A. | P. | RS. | A. | P. | RS. | A. | P. | RS. | A. | P. | |
| 19 | | | | | | | | | | | | | | | | Our school is held free for children as refered previously. Since there is no other source of income to meet the demands of the institution but the grant allowed, the mission with the manager bear the additional balance of expenditure due to be borne. |
| 19 | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | |
| Total .. | | | | | | | | | | | | | | | | |

Particulars for five years to be furnished.

DECLARATION with regard to encumbrance, alienation and the conditions of recognition and aid—" On behalf of the management of the school, I hereby declare that the property is unencumbered and that it will not be alienated or encumbered without the consent of Government and that the conditions of recognition and aid laid down in the Madras Educational Rules and in the Grant-in-Aid Code are being, and will continue to be, fully observed, excepting those rules from which the institution has been specially exempted by the Director's Proceedings No. , dated , and that I am prepared to subject the institution together with its current, endowment and trust accounts, its establishment, time-table and registers to inspection and to furnish such returns as may be required by the department; and that I shall abide by the provisions of rule 56 of the Grant-in-Aid Code in the event of the building being diverted, at any time, to other than educational purposes approved by Government."

Sacred Heart Church.
Shoolay.

STATION, Cttm. Bangalore

*Dated* 23rd September 1933.

J. Fratian,
*Acting Correspondent.*
for
Rev. J. U. D'Souza.

All communications should be addressed to the Secretary to the Resident in Mysore, Bangalore, by designation and not by name.

No. 84. Dated Bangalore, the 3-1-1934.

From

The SECRETARY to the HON'BLE the RESIDENT in MYSORE,

To

The Inspector of Schools,

Coorg and Bangalore.

S.N.1
P.U.C.

Reference:— Your letter No. 3824/1-24, dated the 7th December 1933

**Subject**— Grant for the construction of buildings for the Sacred Heart Boys' and Girls' Schools, Shoolai, Bangalore.

---

Page 12

Under Rule 47(1) of the Grant-in-Aid Code for Indian Schools in the C.& M. Station, Bangalore, the Hon'ble the Resident is pleased to sanction a grant of Rs. 9,758-10-8 (Rupees nine thousand seven hundred and fiftyeight annas ten and pies eight only) or two-thirds of the actual cost, whichever is less, for the construction of buildings for the Sacred Heart Boys' and Girls' Schools, Shoolai, Bangalore.

2. The charge should be met from the allotment in the current year's Assigned Tract budget estimates under the head "Account II-Education-D-Grant-in-Aid to Non-Government Primary Schools-Building and Furniture grant to Primary Schools" to which head necessary reappropriation, if required, will be made in due course.

Secretary to the Resident.

Copy forwarded to the Accountant General, Madras, for information.

2/1/34

S. Singaroyan
14-12-33

16/12

2/1/34